



## Front view

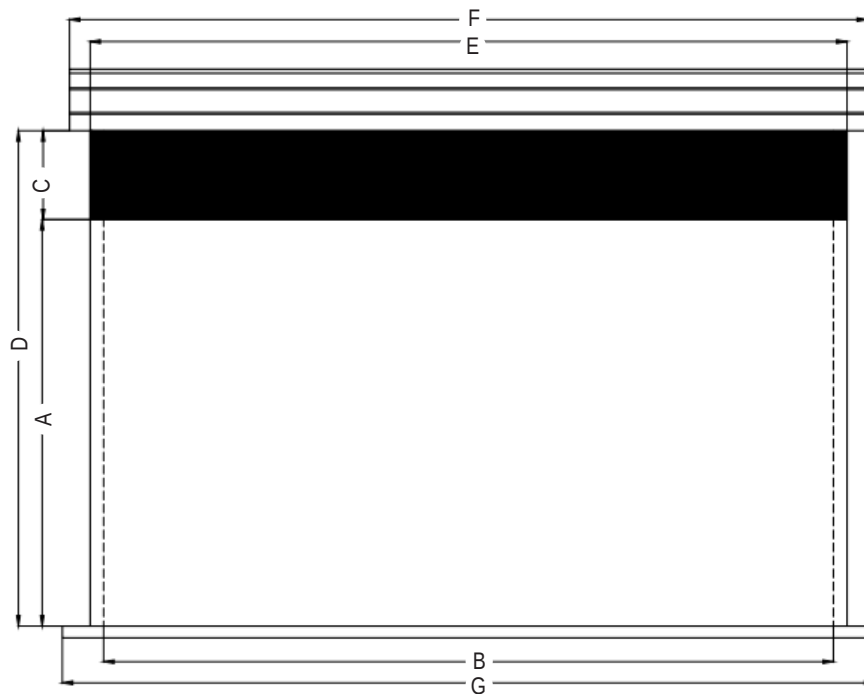


- A Image height
- B Image base
- C Extradrop
- D Overall fabric height
- E Overall fabric base
- F Casing length
- G Weighing bar length

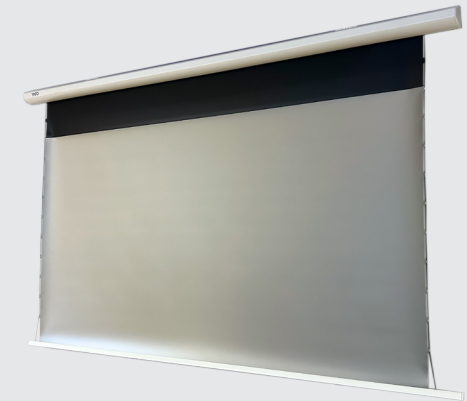

A particularly silent and design screen, easily installed for ALR projections.

- Grey projection surface for UST (Ultra Short Throw) and ALR (Ambient Light Rejection) projections
- Tensioned screen
- Aluminium profile casing with white epoxy finish
- Mixed wall/ceiling mounting

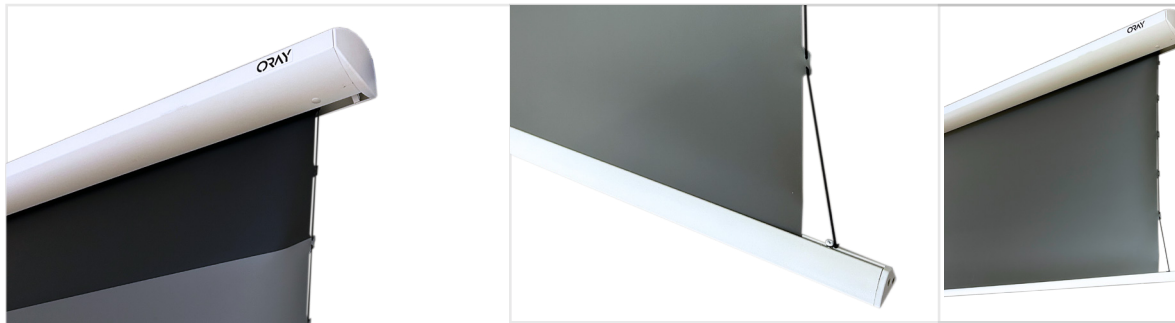


## Technical data

ALR SERIES 3 Reference	A cm	B cm	C cm	D cm	E cm	F cm	G cm
<b>Format 16:9 Extra-drop 30 cm</b>							
SE3AL112200 (90")	111	192	30	141	200	220	216
SE3AL135240 (108")	134	232	30	164	240	260	256

Chemin de Beaurepaire  
91410 DOURDAN - FRANCE  
Tel +33 1 64 59 94 54

## Side view

Casing side view

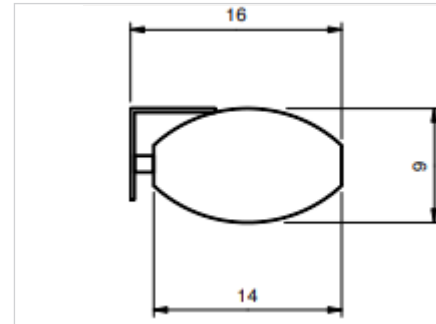

Casing




## Controller

Infrared remote




## Extending brackets

Extending brackets 10 to 20 cm

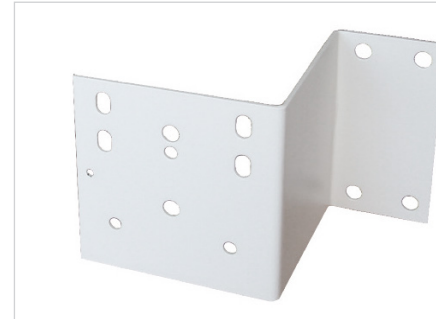

Extending brackets 30 to 40 cm

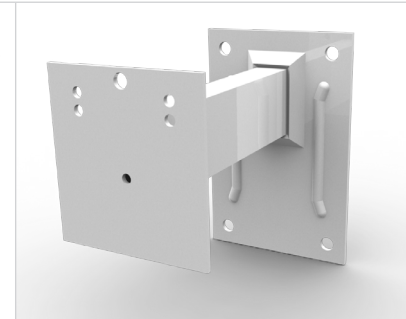

## Extending brackets

Dimension	Reference
10cm	OPTECAR10
20cm	OPTECAR20
30cm	OPTECAR30HCM4
40cm	OPTECAR40HCM4

Chemin de Beaurepaire  
91410 DOURDAN - FRANCE  
Tel +33 1 64 59 94 54



www.oray.fr